



Brackets for No. 25 Track


SIDEWALL

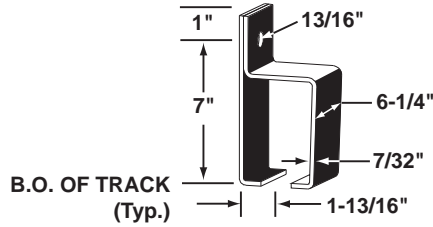

Center
25Px1 painted
25Gx1 galv.



Lock-Joint
25Px39 painted
25Gx39 galv.




End Blind
25Gx2 galv.


Shipping Weight By
Bracket Number & Description

Number	25Px1 25Gx1	25Px39 25Gx39
Description	Center	Lock Joint
Weight in lbs.	6-1/2	7-1/2


OVERHEAD

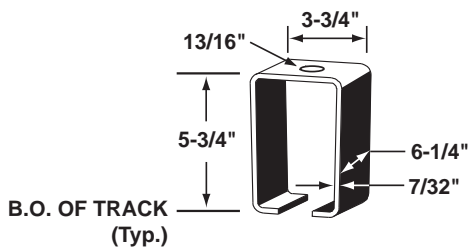

Center
25Px18 painted
25Gx18 galv.



Lock-Joint
25Px189 painted
25Gx189 galv.



End Blind
25Gx2 galv.

Shipping Weight By
Bracket Number & Description

Number	25Px18 25Gx18	25Px189 25Gx189
Description	Center	Lock Joint
Weight in lbs.	6	7

**NOTE: MAX. BRACKET SPACING 60" ON CENTERS FOR 2500 Lbs. CAPACITY.
MAX. BRACKET SPACING 24" ON CENTERS FOR 5000 Lbs. CAPACITY.**

Tracks extend into center stop and end brackets 4-1/2".

*Use end blind in combination with any center bracket to produce an end bracket.

†25 Track joints must be welded on all manual applications over 2500 lbs. and for all powered applications.

See page 19 for welding kit information.