

4

3

2

1

D

D

C



C

B

B

A

A

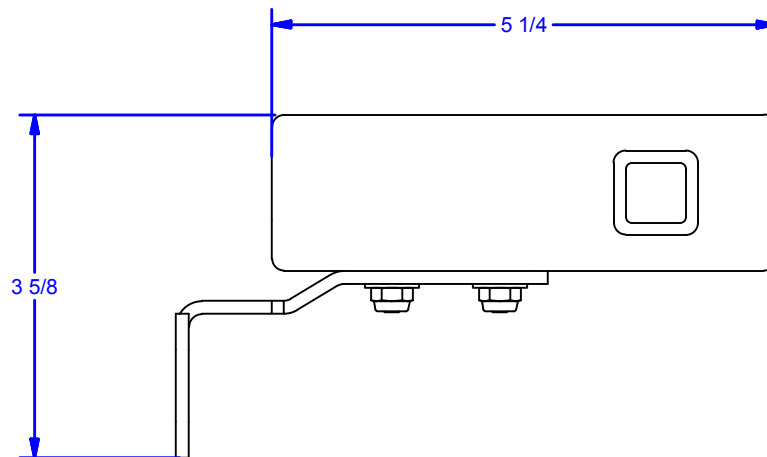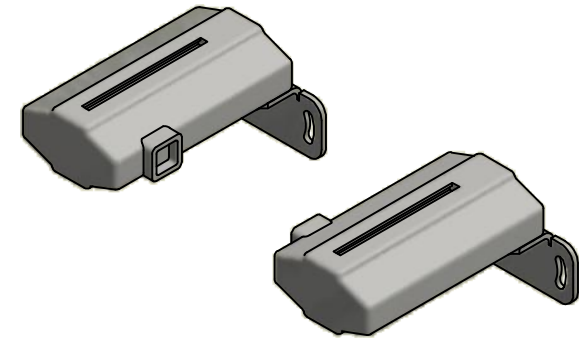


Includes:

1 ea. Transmitter & 1 ea. Receiver.
Front-mounted green LED alignment indicator.
Built-in strain relief (not shown)

Notes:

Infrared thru-beam
Operating Temp Range: -40F to 185F
Maximum Range: 100 Ft.
UL 325 Compliant
Nema 4 Aluminum Enclosure

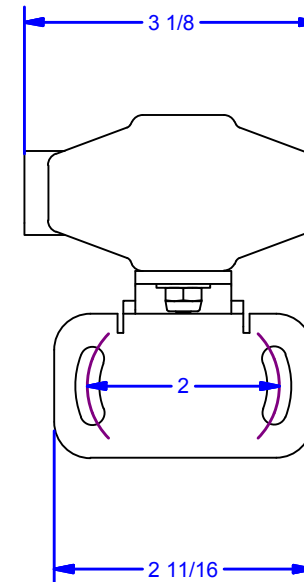

ALL DIMENSIONS IN INCHES

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CROWN INDUSTRIAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CROWN INDUSTRIAL IS PROHIBITED.

DESCRIPTION:

Photo Eye Assembly

FINISH:

ID #:

0002600

MATERIAL:

Aluminum

STOCK PART #:

PE-100

PCS:

2

REV:



**CROWN
INDUSTRIAL**

So. San Francisco, Ca
(650) 952-5150
www.crown-industrial.com

DWG #: 0002608
DRAWN:BCM 1/30/2018
SHEET #1
File: 0002608.idw

4

3

2

1

